YOUR ADVANTAGES WITH AccurioPrint 2100

RETHINK PRINT-FOR-PAY

DURABLE PERFORMANCE

- Up to 100 8.5" x 11" pages per minute
- Up to 56 11" x 17" pages per minute

READY-MADE PRINT PRODUCTS

- Stacking of up to 4,200 sheets
- Two-point and corner Stapling of up to 100 sheets with automatic staple cut mechanism
- Booklet Making up to 80 pages (20 sheets)
- 2- and 3 -hole punching
- Tri-folding up to 3 sheets

GEARED-UP FINISHING

- ZU-608 for z-folding and punching of sheets
- GBC Punch G3 with different die sets for punching, creasing and perforation
- GBC Wire G1 for 8.5" x 11" and 5.5" x 8.5" wire bound books



ENVIRONMENTAL AWARENESS

- Green procurement policy
- Reduced CO₂ emissions

ENHANCED SCANNING PERFORMANCE

- Dual color scanner to scan documents in one pass
- Double sheet detector
- Max. 240 ipm (8.5" x 11", 300 dpi)
- Scanner capacity of 300 sheets

HIGH-END PRINT CONTROL

- Proprietary Konica Minolta controller
- AccurioPro PrintManager to optimize overall workflow



EASE OF USE

- Simple paper catalog settings
- Easy-to-follow on-screen instructions

SOPHISTICATED MEDIA HANDLING

- Optional bypass tray
- Up to 9,000-sheet paper input capacity
- Up to 5 paper input trays

PERFECT IMAGE QUALITY

- 1,200 x 1,200 dpi resolution
- Simitri® HD toner technology
- Image density control technology

COMPREHENSIVE MEDIA PROCESSING


- Up to 300 gsm paper weight in simplex and duplex printing
- Mechanical decurling as standard
- Optional IM-101 Intelligent Media Sensor to automatically identify paper weight and type

FINISHING & FUNCTIONS	Letter fold	2/3 hole Punching	Two-point stapling	Corner stapling	Stacking	Booklet	Z-fold	
Open stacker OT-512								
Staple finisher FS-532m		\bigcirc				\bigcirc		
Ring binding unit GBC G1								
Multi punching unit GBC G3								
Z-Folding unit ZU-608								



Creasing	Slitting	Perforation	Square- folding	Multi Letter fold-In	Post Insertion	Perfect Binding	Wire- binding	Multi- punching
					\bigcirc			
\bigcirc		\bigcirc						



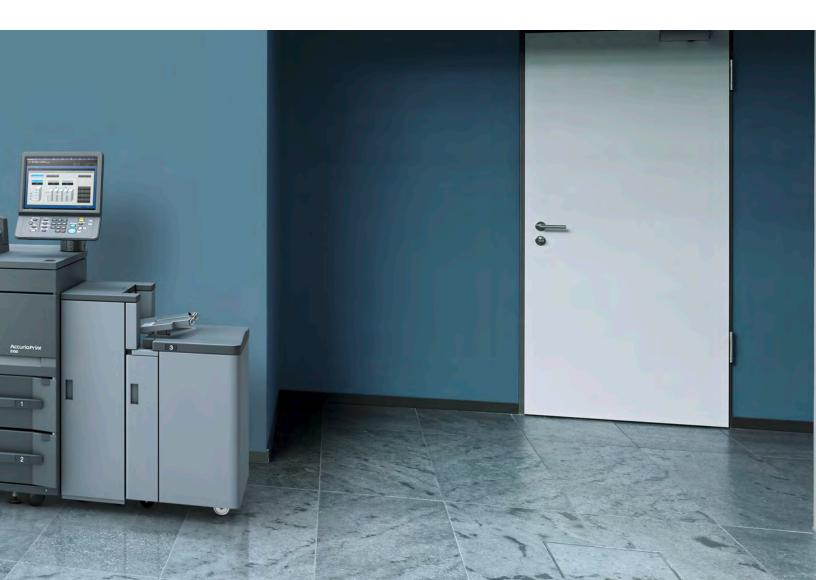

TAKE LEADERSHIP AND RESPONSIBILITY

RETHINK TOMORROW'S BUSINESS

MADE FOR YOUR BUSINESS

Commercial printers

Growing your business and getting the most from your investment is what the AccurioPrint 2100 Series promises to deliver. The high speed, productivity and uptime help you achieve the shortest turnaround times so that you can run more jobs each week. Combined with the exceptional media flexibility – using stocks of up to 350gsm – you can further enhance the offerings of your print shop. And quality issues aren't an issue, because these presses offer a wide range of tools to control and adjust themselves.


CRDs

AccurioPrint 2100 supports a high degree of automation and yet also ensures high-level quality. Professional inline finishing produces ready-made print products at the click of a button. Versitile media flexibility and high productivity make AccurioPrint 2100 a solid and lucrative investment for the future.

DESIGNED FOR OUR PLANET

Konica Minolta promotes sustainable development and integrates environmental and social perspectives into its business strategies. Konica Minolta products support your green strategy – and that helps to build your business, too.

Committed to helping prevent global warming, Konica Minolta strives to reduce CO_2 emissions during product manufacture, product distribution, at the sales stage, and during product use – with even stricter targets than demanded by the Kyoto Protocol. Enabling carbon neutrality, Konica Minolta offers its customers the offset of unavoidable CO_2 emissions for production printing. Together with the experts from Climate Partner, Konica Minolta proposes a new and profound eco concept for our professional production presses.

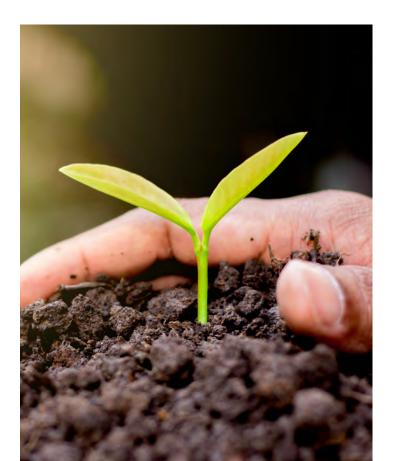

CONTROLLERRETHINK PRODUCTIVITY

KONICA MINOLTA CONTROLLER

Туре	Built-in
Resolution	Print: 1,200 x 1,200 dpi; 600 dpi x 600 dpi Scan: 200 dpi, 300 dpi, 400 dpi, 600 dpi
CPU	Pentium G4400 3.3 GHz
Memory	12 GB (DDR4 U-DIMM x2) 2,133 MHz
HDD	1 TB (SATA/ 7,200 rpm / 3.5 inch)
SSD	4 GB
Interface	Ethernet 10/100/1000BASE-T; SB 3.0 host
Dana Dassription Language	DCLEE /VL/DCLE): Adoba DoctScript 2 /DC2020): DDE directorint /DDEVor 1 7): TIEE /TIEEVor 6) direct print: DDML /Vor 2 2)

Page Description Language PCL5E/XL (PCL6); Adobe PostScript 3 (PS3020); PDF directprint (PDFVer.1.7); TIFF (TIFF Ver.6) direct print; PPML (Ver 2.2)

TECHNICAL SPECIFICATIONS

RETHINK INNOVATION

SYSTEM SPECIFICATIONS

Resolution	1,200 x 1,200 dpi			
Paper weight	40-300 gsm (350 gsm optional*)			
Duplex unit	Non-stack type; 40–300 gsm			
Paper sizes	Standard:			
	Min.: 7.17" x 5.47" (182 x 139 mm)			
	Max.: 12.76" x 18.23" (324 x 463 mm)			
	Optional:			
	Min.: 3.74" x 5.47" (95 x 139 mm)*			
	Max.: 12.76" x 19.02" (324 x 483 mm)**			
Maximum image area	314 x 463 mm (up to 483 mm** optional)			
Paper input capacity	Standard: 3,000 sheets			
	Max.: 9,000 sheets			
Paper output capacity	Max.: 4,200 sheets			
Main unit dimensions	38.98" x 35.83" x 57.24" (990 x 910 x 1454 mm)			
(WxDxH)				
Main unit weight	765 lbs (347 kg)			

PRODUCTIVITY

8.5" x 11"- max. per minute	100 ppm
11" x 17" - max. per minute	56 ppm
12" x 18"- max. per minute	53 ppm
8.5" x 11"- max. per hour	6,000 pph
11" x 17"- max. per hour	3,300 pph
12" x 18"- max. per hour	3,120 pph

CONTROLLER

Embedded Konica Minolta controller

SCANNER SPECIFICATIONS

007.11.1121.101.121.10		
Scan speed 8.5" x 11"	Up to 240 opm	
Scan resolution	600 x 600 dpi	
Scan modes	Scan to HDD; Scan to FTP; Scan to PC; Scan to eMail;	
	Scan to WebDAV; Scan to USB Memory;	
	HDD to FTP/SMB/WebDAV; LDAP supported	
Scan formats	TIFF; PDF; PDF(PDF/A); Encrypted PDF; XPS;	
	CompactPDF; JPEG	

COPIER SPECIFICATIONS

Gradations	256 gradations	
FCOT	Less than 3.4 sec. (8.5" x 11" LEF)	
Magnification	25-400%, in 0.1% steps	
Mutliple copies	1–9,999	

ACCESSORIES

ACCESSORIES	
Large capacity tray 8.5 x 11"	LU-414
Large capacity tray 12 x 18"	LU-415
Air assist paper feed unit	PF-709
Stapling unit	FS-532m
Saddle stitch kit for FS-532	SD-510
Punch kit for FS-532	PK-525
Post inserter for FS-532	PI-502
Multi bypass tray	MB-507
Output tray	OT-507
Open stacker	OT-512
Mount kit for 3rd party	MK-737
Wire binding unit	GBC Wire G1
Inline Multi-punch unit	GBC Punch G3
Relay unit	RU-518m
Humidification unit	HM-103

^{*} With PF-709 + small size guide

- All specifications refer to letter-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities vary depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5 % coverage of letter).
- The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
 - Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any prices or specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

With LU-415